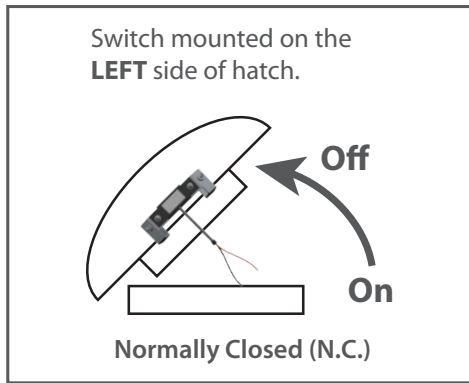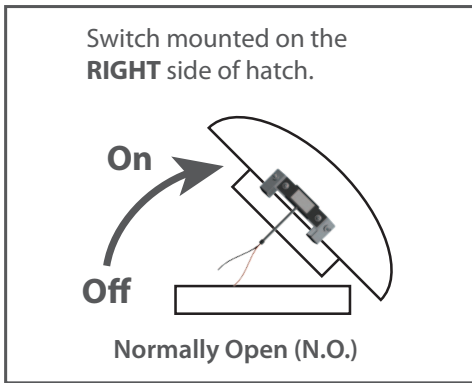**DATASHEET**
SX1000-S30

OTC

Highlights

- Instantly detect thief hatch open/close status
- Provides a 30 ft (9.1 m) robust industrial extension cable
- Simple apparatus / dry contact switch
- Can be mounted on either side of thief hatch
- Compatible with OleumTech wireless and serial level transmitters with discrete input(s)
- Extremely quick and easy to install

Switch mounted on the **RIGHT** side of hatch.

On

Off

Normally Open (N.O.)

Switch mounted on the **LEFT** side of hatch.

Off

On

Normally Closed (N.C.)

HATCH CLOSED

HATCH OPEN

TECHNICAL SPECIFICATIONS	
Contact Capacity	· 60 Volts Max, 0.25 A Max, 3 VA Max
Contact Resistance	· 5 Ω Max Measured 10° Below Horizontal at 5 Vdc
Differential Angle	· 15° Max
Operating Temperature	· -37° to 100°C
Connection	· Flying Leads
Cable Length	· 30 ft (9.1 m)
Mounting	· 2 Brackets with 2 Set Screws (2 mm or 5/64" Hex)
Part Number	· SX1000-S30

ISO 9001 REGISTERED COMPANY

MADE IN USA