



**ISO 9001:2008**  
Certified

888-367-4286  
713-559-9200  
fax 281-292-2860

www.detcon.com  
sales@detcon.com

# MODEL DM-600-HF

## HYDROGEN FLUORIDE SENSOR ASSEMBLY

### Electrochemical Fuel Cell

### MicroSafe™ Intelligent Sensor



## SPECIFICATIONS

### Sensor Type

Electrochemical Fuel Cell

### Measurement Range

0-10 ppm Hydrogen Fluoride  
Other ranges available

### Repeatability

±2% FS

### Response/Clearing Time

T90 <90 seconds

### Span Drift

<10% signal loss per month

### Operating Temperature Range

-20°C to +35°C; -4°F to +95°F

### Operating Humidity Range

10-80% RH non-condensing

### Output

Linear 4-20 mA DC  
RS-485 Modbus™  
3 Relays (alarm 1, 2, fault, contacts 5 amp)

### Input Voltage

22.5-28 VDC

### Power Consumption

2.9 watts @ 24 VDC

### Electrical Classification

Explosion proof  
Class 1, Div. 1, Groups B, C, D

### Ingress Protection

NEMA 4X, IP66


### Sensor Life/Warranty

Sensor: 1 year warranty  
Transmitter: 2 year warranty

### Safety Approvals

CSA/NRTL (US OSHA Certified)

## DIMENSIONS

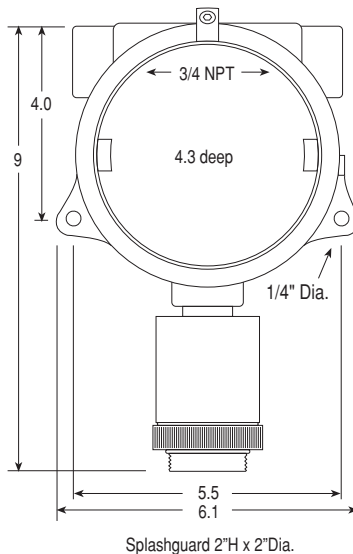

## DESCRIPTION

Detcon Model DM-600IS-HF sensor is designed to detect and monitor HF in air over the range 0-10 ppm. The sensor assembly consists of an electrochemical fuel cell mounted in an Intrinsically Safe stainless steel and ABS plastic housing that includes a splashguard with integral cal port, a signal conditioning control transmitter circuit, a base connector board and an explosion proof junction box. The Intrinsically Safe sensor housing design allows direct contact of the target gas to the electrochemical sensor, thus maximizing response time, detectability and repeatability. And because the Intrinsically Safe housing design does not use a stainless steel flame arrestor, it eliminates inaccurate readings due to target gas absorption.

## FEATURES

- ▷ CSA and UL Approved: Class 1, Div. 1, Groups B, C, & D
- ▷ Outputs: 4-20 mA, RS-485 Modbus™, 3 relays (2 alarm, 1 fault)
- ▷ Sensor status and parameters accessible via RS-485 Modbus™
- ▷ Simple menu driven calibration - takes less than 3 minutes
- ▷ Backlit LCD, and LED indicators for Fault, and Cal status
- ▷ Universal plug-in transmitter
- ▷ Intrinsically Safe Sensor Housing
- ▷ Plug-in field-replaceable transmitter
- ▷ Electrochemical plug-in sensor

## ORDER GUIDE

PN 966-333380-010 DM-600IS-HF in Aluminum Junction Box  
PN 966-33338B-010 DM-600IS-HF in Stainless Steel Junction Box

**www.detcon.com**